



LightVision Technologies, Corp.

6F#5, No.40-2, Sec.1, Ming Sheng N. Rd., Kwei-Shan, Taoyuan 333, Taiwan(R.O.C.)

Website: www.lightvision.com.tw

E-mail : sales@lightvision.com.tw


Tel: 886-3-3555931 Fax: 886-3-3555934

Pet's Digital Diary User Manual

This is fully auto image recorder, include photos and videos, you can have the image diary of your pet's easily, visit your pet's world. That will bring much fun for you.


Product Introduction

1) Main Function

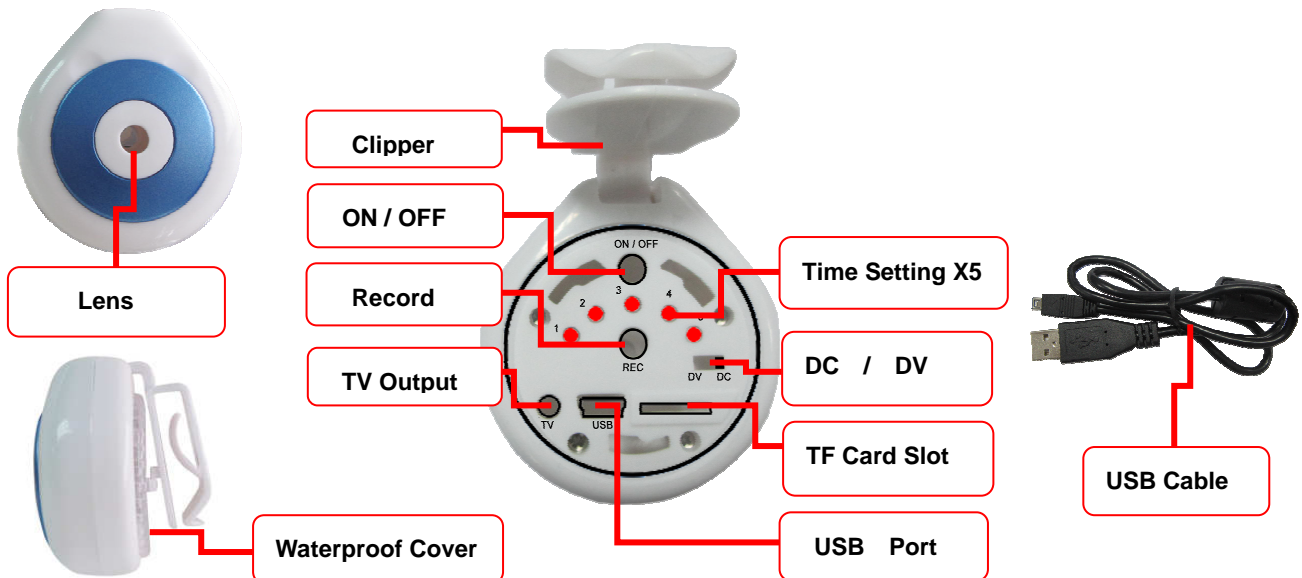

2) Specification

- ▶ High Performance Digital Camera
- ▶ Digital Video Camera
- ▶ Auto Snapping
- ▶ Auto Video Recording
- ▶ USB Port
- ▶ TV Output
- ▶ Water-proof design
- ▶ Build-in Li-battery
- ▶ Rigid body good protection

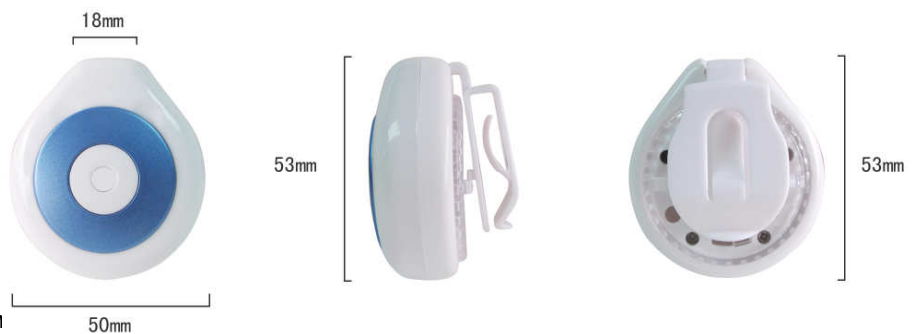



LightVision Technologies, Corp.
6F#5, No.40-2, Sec.1, Ming Sheng N. Rd., Kwei-Shan, Taoyuan 333, Taiwan(R.O.C.)
Website: www.lightvision.com.tw
E-mail : sales@lightvision.com.tw
Tel: 886-3-3555931 Fax: 886-3-3555934

Caution: Read Before Use It

- 1) This pet's digital diary is not design for in-water use. It for basic water proof & dust proof.
- 2) Keep away from Heat.
- 3) Maintain by soft-cloth cleaning.
- 4) Full Charge the battery before use.
- 5) Download image data after use.
- 6) Don't use continuously over 48 hours.
- 7) Keep away from water when open the rear cover.

How to use? Easy Go!

- 1) Open the waterproof rear cover

- 2) Plug-in TF card

Note: A. Format the Memory Card before use

B. If TF Memory Card run out, this machine will auto show down after 5 LED Flashing 6 Times.

- 3) Start the camera after press the 'ON / OFF' key

- 4) Select :


A. Camera Digital Mode: Work & function like a camera.

It will be no-function when memory card is full or battery is run out.

Switch to "DC" mode , This camera take snap shot according to the setting time.

and press "REC" Key to set the capture time(10 Sec., 30 Sec., 60 Sec., 3Min., 5Min.), then start to take pictures and the LED will flashing every 2 seconds.

- .
- L1 on——Snap per 10 Sec
 - L2 on——Snap per 30 Sec
 - L3 on——Snap per 60 Sec
 - L4 on——Snap per 3 Min
 - L5 on——Snap per 5 Min

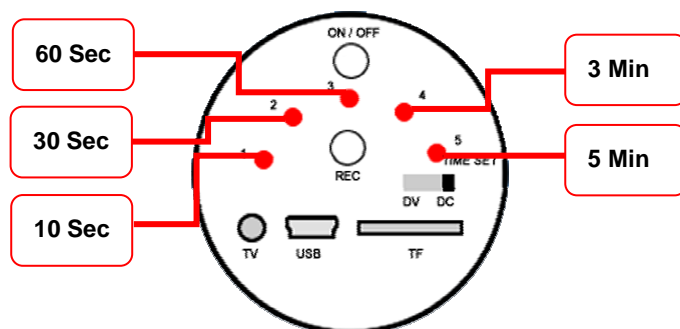

B. DV Mode: Work & function like a DV

It will be no-function when memory card is full or battery is run out.

Switch to "DV" mode, then the LED will flashing every 4 seconds & Start recording..



LightVision Technologies, Corp.

6F#5, No.40-2, Sec.1, Ming Sheng N. Rd., Kwei-Shan, Taoyuan 333, Taiwan(R.O.C.)

Website: www.lightvision.com.tw

E-mail : sales@lightvision.com.tw

Tel: 886-3-3555931 Fax: 886-3-3555934

Note: If your operation confused, please follow next process to reset:

- A. Switch to 'DV'
- B. Continuously press "REC" button
- C. Until L1 LED on (only NO1 on), then the reset is complete.

5) Download photo & Video file

Link to PC through USB cable, you can directly download the image files it work like memory card.

Recharge Battery: Recharge by USB cable

Through USB port link by USB cable. And the LED will on by sequence when recharging. When 5 LED all on, it means the recharge process has done. It takes about 3 hours to Complete Battery Recharge.

How to use TV playback:

Joint TV output cable to the TV (Video) port, the auto play start display by sequence. You can pause/replay by press "ON/OFF" key, and jump to next by press "REC"

Time Setting:

In different time zone, user can adjust the time by:

1. Open the inside file of machine & find a file named "time.txt".
2. Adjust the time frame (2011-05-01 23:59:59) to your current time.
3. Time is auto adjust on or off. No matter the machine.